

# Drawn Cup Roller Clutches

NSK drawn cup roller clutches are high-performance products that enable users to make the ideal choice from among a wide selection for meeting the needs of various applications.





**Drawn cup roller clutches featuring easy installation and high performance in a compact design.**

Drawn Cup Roller Clutches



**1. Compact and lightweight**

Unique structure of the drawn cup outer ring makes the clutch compact and lightweight.

**2. Accurate action**

Accurate performance and low friction torque during overrun.

**3. Superior durability**

High torque capacity and superior durability; same cross-section height as standard drawn cup needle bearings.


**4. Easy to mount**

Installation is easily accomplished with a simple press fit in the housing.



# Selecting type of drawn cup roller clutch

NSK drawn cup roller clutches are one-way clutches that have the unique structure of a drawn cup outer ring and are extremely compact. The clutches offer accurate performance, low frictional torque for overrun, and are easy to install. NSK has a broad product lineup, including drawn cup roller clutches for high torque loads, plastic housing, and integrated units. The bearings have a solid reputation built over the years for their durability and reliability.

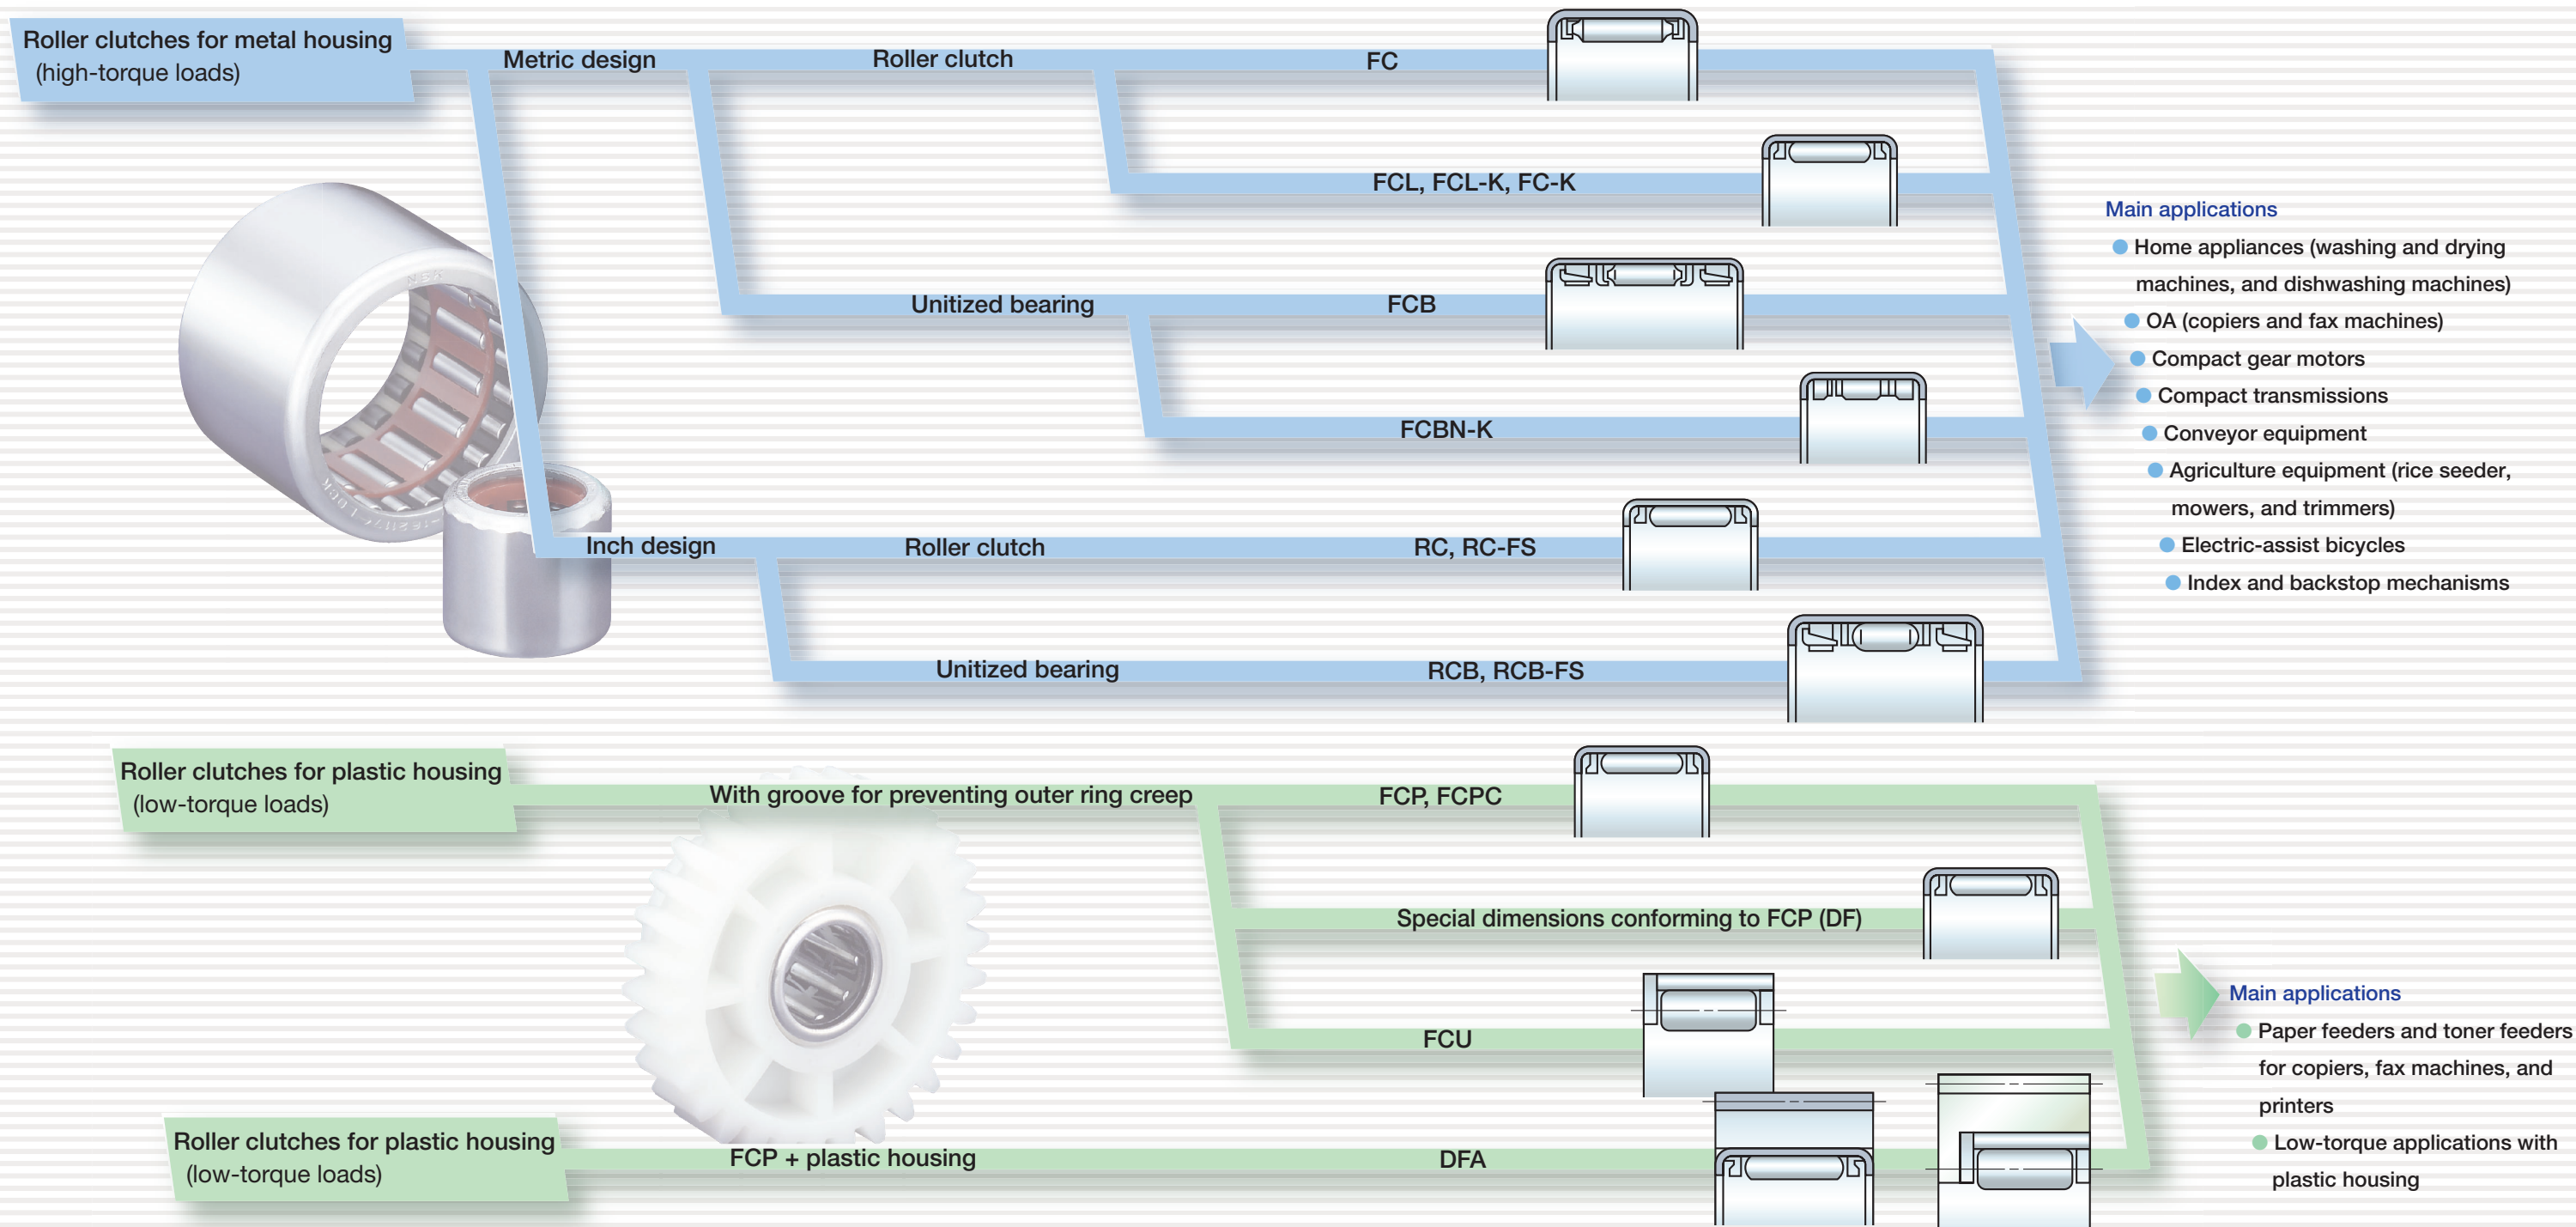

FC·FCL·FCB·FCBN (Metric)  
RC·RCB (Inch)

Design and types

Drawn cup roller clutches for metal housing consist of an outer ring, which forms a cam face on a bore surface by precision deep drawing, rollers, a cage, and spring. Table 1 gives the types of drawn cup roller clutches, and Figs. 1 and 2 show the states of engagement and overrun.



Table 1 Types of Drawn Cup Roller Clutches

| Type   | Code   | Description  |
|--------|--------|--|
| Metric | FC     | For torque transmissions only; contains stainless steel spring                                 |
|        | FCL    | For torque transmissions only; contains stainless steel spring                                 |
|        | FCB    | For torque transmissions and bearing radial load; containing stainless steel spring            |
|        | FCBN   | Narrow type; for torque transmissions and bearing radial load; contains stainless steel spring |
| Inch   | RC     | For torque transmissions only; contains plastic spring   |
|        | RCB    | For torque transmissions and bearing radial load; containing plastic spring                    |
|        | RC-FS  | For torque transmissions only; contains stainless steel spring                                 |
|        | RCB-FS | For torque transmissions and bearing radial load; containing stainless steel spring            |

Remarks The standard structure for metric drawn cup roller clutches is a spring pushing multiple rollers. The K type consists of a spring pressing a single roller for low torque. (K is included at the end of the bearing number.)

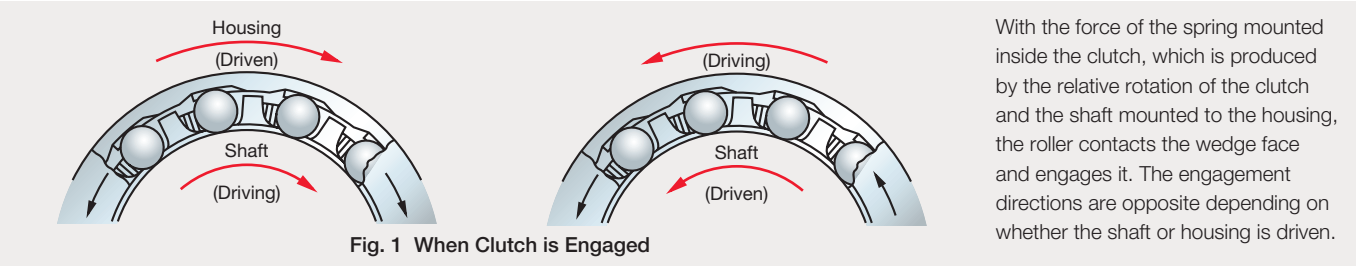


Fig. 1 When Clutch is Engaged

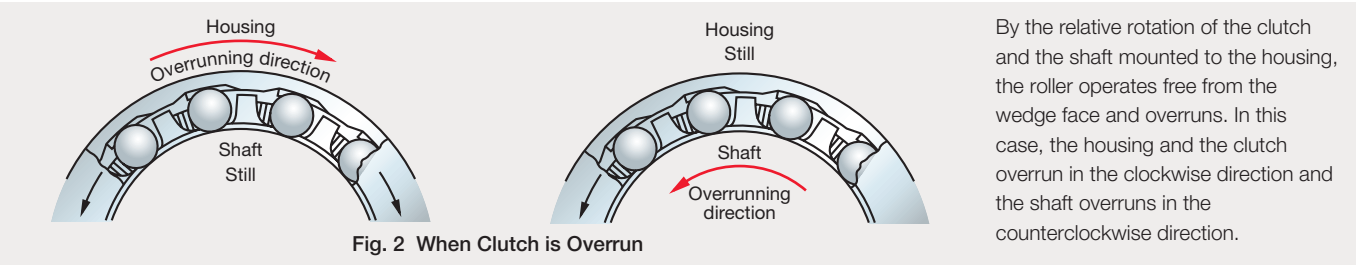


Fig. 2 When Clutch is Overrun

Specifications of shaft and housing

Drawn cup roller clutches do not usually use an inner ring, but rather use the shaft as a raceway ring. Made of thin steel plate, they perform best only with press fitting into normal housing. Therefore, the dimensional accuracy and hardness of the shaft and housing are required to satisfy the specification given in Table 2. Fittings of the drawn cup roller clutch for metal housing under ordinary operating conditions are given in Table 3.

Table 2 Accuracy, Roughness, and Hardness

| Classification             | Shaft   | Housing bore     |
|----------------------------|---|------------------|
| Out-of-roundness tolerance | IT3<br>2  | IT4 ~ IT5<br>2 2 |
| Cylindrical tolerance      | IT3<br>2  | IT4 ~ IT5<br>2 2 |
| Roughness, R <sub>a</sub>  | 0.4   | 1.6              |
| Hardness                   | HRC58-64<br>Requires layer hardening to proper depth. | —                |

Table 3 Fittings for Drawn Cup Roller Clutches

| Type   |                    | Fitting tolerance |              |
|--------|--------------------|-------------------|--------------|
|        |                    | Shaft             | Housing bore |
| Metric | FC, FCL, FCB, FCBN | h6                | N7           |
| Inch   | RC (FS), RCB (FS)  | h6                | J7           |

Mounting

For press fitting of drawn cup roller clutches into the housing bore, it is necessary to prevent the outer ring from deformation and damage by using an appropriate jig as shown in Fig. 4.

Precautions for mounting are described below:

- 1) Use a hand press or similar tool for press fitting. Avoid fitting by striking with a hammer.
- 3) A snap ring and shoulder for positioning the roller clutch are not required. When press fitting the roller clutch into the housing with a shoulder or a closed end, care should be taken not to have the side face of the roller clutch contact the shoulder or bottom.

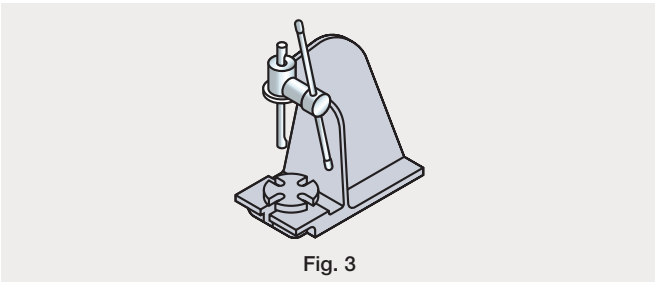


Fig. 3

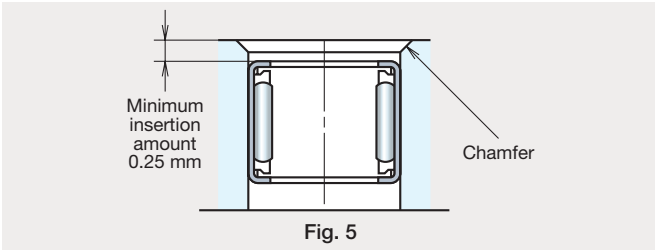


Fig. 5

- 2) Place the roller clutch side face on the marked side onto the jig shoulder. For accurate press fitting, provide a stopper for the locations and guide.
- 4) When assembling the shaft, keep rotating it while mounting. A large chamfer for the corner of the shaft is advisable.

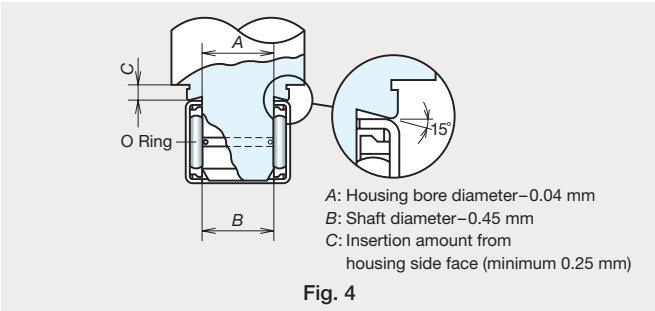


Fig. 4

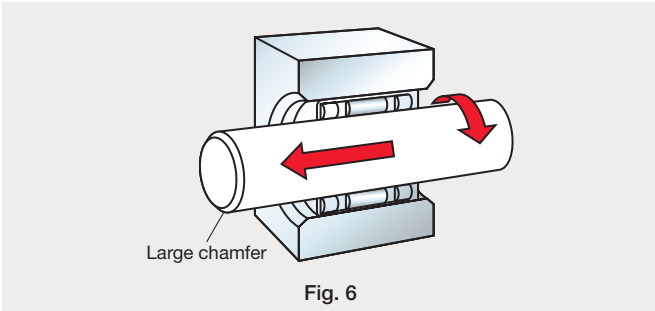


Fig. 6

Operating temperature and engagement speed

The operating temperature of drawn cup roller clutches should be 90 °C or less for a standard plastic spring and 120 °C or less for a stainless steel spring. When engagement speed exceeds 200 cycles per minute and when operation of the spring is impaired by low temperatures, a clutch with a stainless steel spring must be used.

Lubrication

Oil lubrication is generally recommended, and under the conditions described below, it is required.

- Overrunning
- High engagement speed
- Very low transmitting torque
- High operating temperature

As grease lubrication is common, NSK produces bearings packed with standard grease.

Engagement direction

Clutch engagement takes place when rotating the housing in the direction of the arrow (←LOCK) marked on the side face of the drawn cup outer ring.


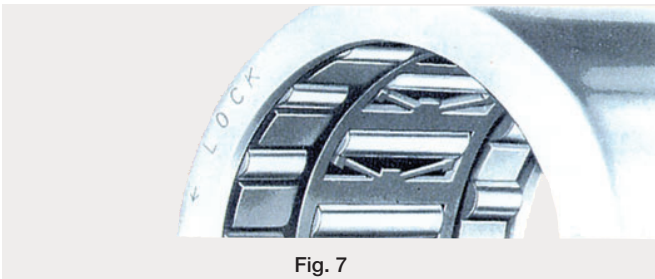


Fig. 7

Grease containing extreme pressure additives should be avoided as it may cause slippage. Hardening of grease due to deterioration and formation of sludge impair the lock performance of the clutch. Extreme caution must be taken to prevent deterioration of lubricant. It is extremely essential to monitor for any deterioration of lubricant. If replenishment is required, please contact NSK to select the proper lubricant.


FC·FCL (Metric)

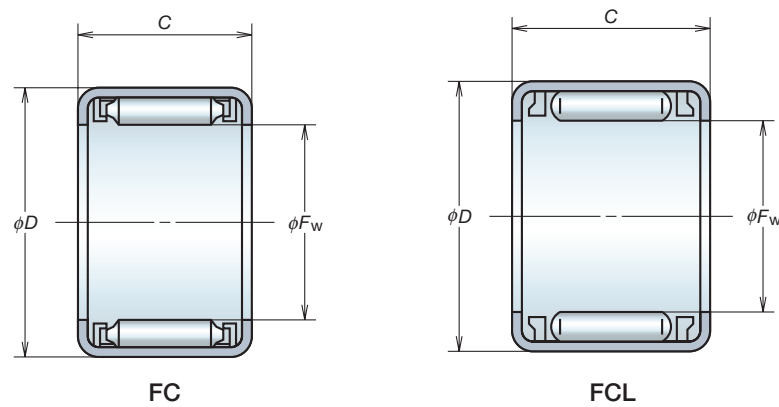

| Roller Clutch Numbers | Boundary Dimensions (mm) |     |  | Torque Capacities (N · m) | Mass (g) approx. | Minimum Outside Diameters of Housing (mm) | Matching Support Needle Roller Bearing Numbers |           |
|-----------------------|--------------------------|-----|--|---------------------------|------------------|---|--|-----------|
|                       | $F_w$                    | $D$ | $C \begin{smallmatrix} 0 \\ -0.25 \end{smallmatrix}$ |                           |                  |   | Full Complement                                | With Cage |
| FC-4K (¹)             | 4                        | 8   | 6  | 0.31                      | 0.90             | 12  | F-48   | —         |
| FC-6                  | 6                        | 10  | 12   | 2.45                      | 4.1              | 14  | F-68   | FJ-69     |
| FC-6K (¹)             | 6                        | 10  | 12   | 1.96                      | 2.7              | 14  | F-68   | FJ-69     |
| FCL-8K (¹)            | 8                        | 12  | 12   | 3.24                      | 3.3              | 18  | F-810  | FJ-810    |
| FC-8                  | 8                        | 14  | 12   | 4.02                      | 6.8              | 20  | FH-810   | FJH-810   |
| FCL-10K (¹)           | 10                       | 14  | 12   | 4.41                      | 3.9              | 23  | F-1010   | FJ-1010   |
| FC-10                 | 10                       | 16  | 12   | 5.30                      | 9.1              | 25  | FH-1010  | FJH-1010  |
| FC-12                 | 12                       | 18  | 16   | 13.24                     | 12               | 27  | FH-1212  | FJH-1212  |
| FC-14K (¹)            | 14                       | 20  | 16   | 14.22                     | 16               | 29  | F-1412   | FJ-1412   |
| FC-16                 | 16                       | 22  | 16   | 20.59                     | 18               | 31  | F-1612   | FJ-1612   |
| FC-20                 | 20                       | 26  | 16   | 30.89                     | 21               | 38  | F-2012   | FJ-2012   |
| FC-20K (¹)            | 20                       | 26  | 16   | 29.42                     | 16               | 38  | F-2012   | FJ-2012   |
| FC-25                 | 25                       | 32  | 20   | 68.65                     | 34               | 46  | F-2516   | FJ-2516   |
| FC-25K (¹)            | 25                       | 32  | 20   | 65.70                     | 26               | 46  | F-2516   | FJ-2516   |
| FC-30                 | 30                       | 37  | 20   | 95.12                     | 42               | 51  | F-3020   | FJ-3020   |

Note (¹) Bearing numbers ending in K have a lock function and offer higher reliability.  
Remarks Be sure to check if the product is in stock. Consult NSK when selecting.


FCB·FCBN (Metric)

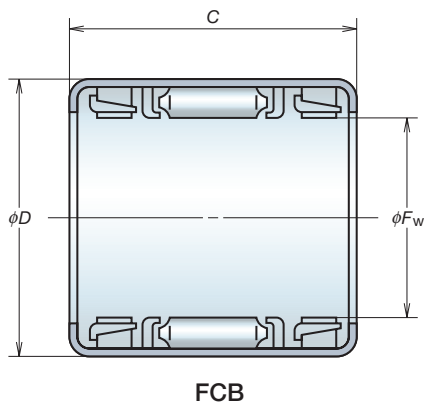


| Roller Clutch Numbers | Boundary Dimensions (mm) |     |  | Torque Capacities (N · m) | Mass (g) approx. | Minimum Outside Diameters of Housing (mm) | Basic Load Ratings (N) | Limiting Loads (N) |
|-----------------------|--------------------------|-----|--|---------------------------|------------------|---|------------------------|--------------------|
|                       | $F_w$                    | $D$ | $C \begin{smallmatrix} 0 \\ -0.25 \end{smallmatrix}$ |                           |                  |   | $C_r$                  | $P_{max}$          |
| FCBN-4K (¹)           | 4                        | 10  | 9  | 0.19                      | 2.7              | 16  | 1 190                  | 540                |
| FCBN-6K (¹)           | 6                        | 12  | 10   | 0.56                      | 3.8              | 18  | 1 630                  | 735                |
| FCB-8                 | 8                        | 14  | 20   | 4.02                      | 11               | 20  | 2 430                  | 1 200              |
| FCB-10                | 10                       | 16  | 20   | 5.30                      | 13               | 25  | 2 820                  | 1 450              |
| FCB-12                | 12                       | 18  | 26   | 13.24                     | 18               | 27  | 3 800                  | 2 240              |
| FCB-16                | 16                       | 22  | 26   | 20.59                     | 24               | 31  | 4 100                  | 2 670              |
| FCB-20                | 20                       | 26  | 26   | 30.89                     | 28               | 38  | 5 100                  | 3 550              |
| FCB-25                | 25                       | 32  | 30   | 68.65                     | 48               | 46  | 6 850                  | 4 700              |
| FCB-30                | 30                       | 37  | 30   | 95.12                     | 54               | 51  | 7 000                  | 5 250              |

Note (¹) Bearing numbers ending in K have a lock function and offer higher reliability.  
Remarks Be sure to check if the product is in stock. Consult NSK when selecting.

RC (Inch)

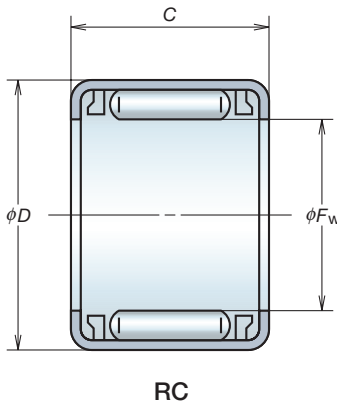

RCB (Inch)

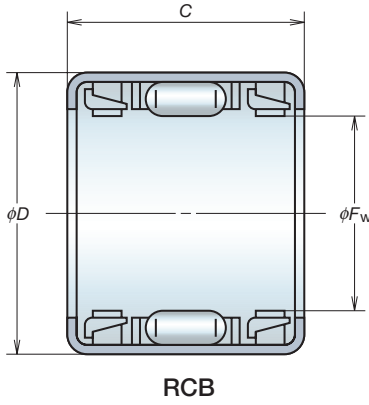

| Roller Clutch Numbers | Boundary Dimensions (mm, inch) |        |               |        |       |               | Torque Capacities (N · m) | Mass (g) approx. | Minimum Outside Diameters of Housing (mm) | Matching Support Needle Roller Bearing Numbers |           |
|-----------------------|--------------------------------|--------|---------------|--------|-------|---------------|---------------------------|------------------|---|--|-----------|
|                       | $F_w$                          | $D$    | $C_{-0.25}^0$ | $F_w$  | $D$   | $C_{-0.25}^0$ |                           |                  |   | Full Complement                                | With Cage |
| RC-040708             | 6.350                          | 0.2500 | 11.112        | 0.4375 | 12.70 | 0.5000        | 1.96                      | 3.6              | 16  | B-45   | J-45      |
| RC-040708-FS (¹)      | 6.350                          | 0.2500 | 11.112        | 0.4375 | 12.70 | 0.5000        | 1.96                      | 3.6              | 16  | B-45   | J-45      |
| RC-061008             | 9.525                          | 0.3750 | 15.875        | 0.6250 | 12.70 | 0.5000        | 5.10                      | 7.7              | 22  | BH-68  | JH-68     |
| RC-061008-FS (¹)      | 9.525                          | 0.3750 | 15.875        | 0.6250 | 12.70 | 0.5000        | 5.10                      | 7.7              | 22  | BH-68  | JH-68     |
| RC-081208             | 12.700                         | 0.5000 | 19.050        | 0.7500 | 12.70 | 0.5000        | 8.34                      | 9.1              | 28  | BH-88  | JH-88     |
| RC-081208-FS (¹)      | 12.700                         | 0.5000 | 19.050        | 0.7500 | 12.70 | 0.5000        | 8.34                      | 9.1              | 28  | BH-88  | JH-88     |
| RC-101410             | 15.875                         | 0.6250 | 22.225        | 0.8750 | 15.88 | 0.6250        | 16.18                     | 14               | 30  | BH-108   | JH-108    |
| RC-101410-FS (¹)      | 15.875                         | 0.6250 | 22.225        | 0.8750 | 15.88 | 0.6250        | 16.18                     | 14               | 30  | BH-108   | JH-108    |
| RC-121610             | 19.050                         | 0.7500 | 25.400        | 1.0000 | 15.88 | 0.6250        | 22.06                     | 15               | 36  | B-1210   | J-1210    |
| RC-121610-FS (¹)      | 19.050                         | 0.7500 | 25.400        | 1.0000 | 15.88 | 0.6250        | 22.06                     | 15               | 36  | B-1210   | J-1210    |
| RC-162110             | 25.400                         | 1.0000 | 33.338        | 1.3125 | 15.88 | 0.6250        | 46.58                     | 26               | 48  | BH-168   | JH-1612   |
| RC-162110-FS (¹)      | 25.400                         | 1.0000 | 33.338        | 1.3125 | 15.88 | 0.6250        | 46.58                     | 26               | 48  | BH-168   | JH-1612   |

Note (¹) Even if the suffix FS is not marked on the product, it can be distinguished from others because its cage is always red.  
Remarks Be sure to check if the product is in stock. Consult NSK when selecting.

| Roller Clutch Numbers | Boundary Dimensions (mm, inch) |        |               |        |       |               | Torque Capacities (N · m) | Mass (g) approx. | Minimum Outside Diameters of Housing (mm) | Basic Load Ratings (N) $C_r$ | Limiting Loads (N) $P_{max}$ |
|-----------------------|--------------------------------|--------|---------------|--------|-------|---------------|---------------------------|------------------|---|------------------------------|------------------------------|
|                       | $F_w$                          | $D$    | $C_{-0.25}^0$ | $F_w$  | $D$   | $C_{-0.25}^0$ |                           |                  |   |                              |                              |
| RCB-061014            | 9.525                          | 0.3750 | 15.875        | 0.6250 | 22.22 | 0.8750        | 5.10                      | 14               | 22  | 3 700                        | 2 010                        |
| RCB-061014-FS (¹)     | 9.525                          | 0.3750 | 15.875        | 0.6250 | 22.22 | 0.8750        | 5.10                      | 14               | 22  | 3 700                        | 2 010                        |
| RCB-081214            | 12.700                         | 0.5000 | 19.050        | 0.7500 | 22.22 | 0.8750        | 8.34                      | 16               | 28  | 4 400                        | 2 580                        |
| RCB-081214-FS (¹)     | 12.700                         | 0.5000 | 19.050        | 0.7500 | 22.22 | 0.8750        | 8.34                      | 16               | 28  | 4 400                        | 2 580                        |
| RCB-101416            | 15.875                         | 0.6250 | 22.225        | 0.8750 | 25.40 | 1.0000        | 16.18                     | 23               | 30  | 4 900                        | 3 050                        |
| RCB-101416-FS (¹)     | 15.875                         | 0.6250 | 22.225        | 0.8750 | 25.40 | 1.0000        | 16.18                     | 23               | 30  | 4 900                        | 3 050                        |
| RCB-121616            | 19.050                         | 0.7500 | 25.400        | 1.0000 | 25.40 | 1.0000        | 22.06                     | 26               | 36  | 5 550                        | 3 700                        |
| RCB-121616-FS (¹)     | 19.050                         | 0.7500 | 25.400        | 1.0000 | 25.40 | 1.0000        | 22.06                     | 26               | 36  | 5 550                        | 3 700                        |
| RCB-162117            | 25.400                         | 1.0000 | 33.338        | 1.3125 | 27.00 | 1.0630        | 46.58                     | 45               | 48  | 9 750                        | 6 750                        |
| RCB-162117-FS         | 25.400                         | 1.0000 | 33.338        | 1.3125 | 27.00 | 1.0630        | 46.58                     | 45               | 48  | 9 750                        | 6 750                        |

Note (¹) Even if the suffix FS is not marked on the product, it can be distinguished from others because its cage is always red.  
Remarks Be sure to check if the product is in stock. Consult NSK when selecting.



## FCP (Metric)

### ■ Features

- 1. Can be easily unitized**  
The gear, pulley, rollers, etc., can be made into a unit with plastic parts if necessary.
- 2. Creep prevention mechanism**  
Creep is reliably prevented by combining a thin roller clutch with a special groove around the outer bore of the outer ring, and by precision pressing of plastic parts.
- 3. High accuracy, superior durability**  
The cam face is formed by precision deep drawing, so it offers high precision and superior durability.
- 4. Compact and lightweight**  
This series offers a compact size and a lightweight construction.

### ■ Design

Drawn cup roller clutches for plastic housings consist of a cam face on the inner bore of a precision deep drawn cup, a cup outer ring with a creep prevention groove formed on its outer bore, rollers, and an integrated cage with spring. The integrated housing can be provided with a resin gear, pulley, or roller, so various types can be made according to requirements. The engagement and overrun state of the roller clutch is shown in **Figs. 8 and 9**.

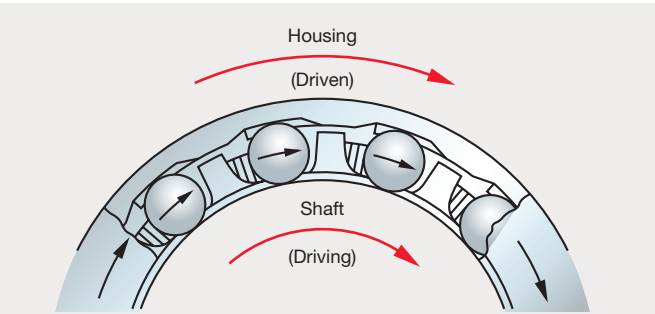
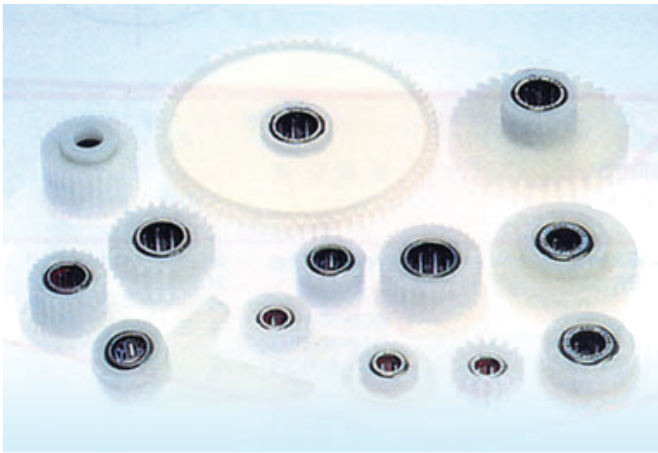


Fig. 8 Clutch Engagement

When the shaft turns to the right, the roller pressed by the action of the cage's spring proceeds to the cam face engagement position, where the entire assembly is turned with the shaft.

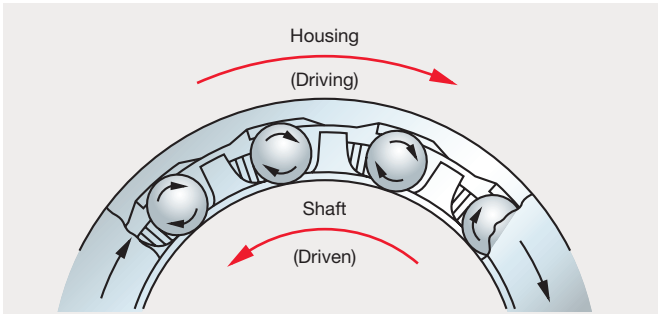


Fig. 9 Clutch Overrun

When the housing turns faster to the right than the shaft, the shaft turns to the left relative to the housing. The rollers instantaneously separate from the cam face.

### ■ Specifications and fitting of shaft and housing

When drawn cup roller clutches for plastic housings are press-fitted into plastic housings, specifications are for normal dimension and dimensional accuracy.

Shaft specifications are given on the right.

Fitting is basically the same as for drawn cup roller clutches for metal housing, but differs largely according to operating conditions. Contact NSK for details.

Shaft/material: Metal such as S-C, SS-, SUS  
Hardness HRC50 or more

Shaft/accuracy: Class h9

Shaft/surface hardness: 0.4 R<sub>a</sub>

Housing: Contact NSK for housing shape or inner bore dimensions when using with a clutch. The clutch can also be used with cylindrical steel or aluminum housings. Contact NSK for details concerning fitting, etc.

### ■ Mounting

When fitting the roller clutch into a plastic housing, the creep prevention groove on the outer bore of the roller clutch must be matched with the phase of the protrusion on the inner bore of the housing.

Other than that, the fitting method and mounting jig are the same as for drawn cup roller clutches for metal housings.

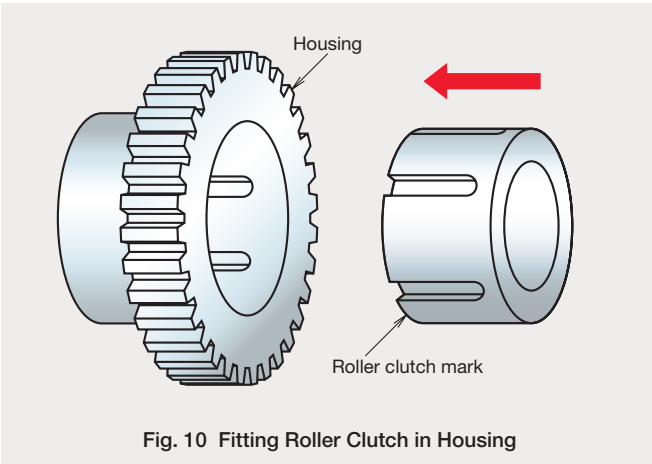


Fig. 10 Fitting Roller Clutch in Housing

### ■ Operating temperature



The operating temperature range of the roller clutch is -10 °C to 90 °C. Contact NSK if you plan to use the roller clutch outside this range.

### ■ Lubrication


The roller clutch is sealed with special grease and does not need to be replenished. Take steps to prevent ingress of other types of grease or foreign matter during operation.

### ■ Life

With the torque capacity given in the dimensions table, the life is 1 million engagements or more.

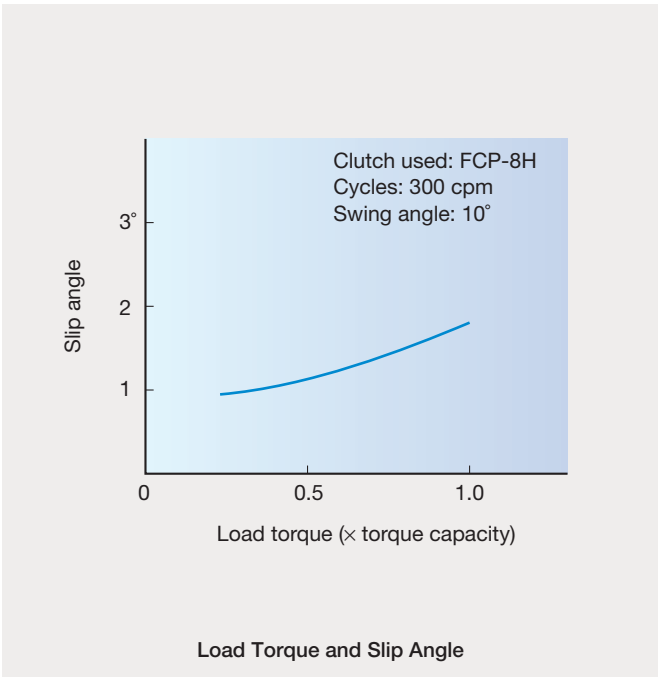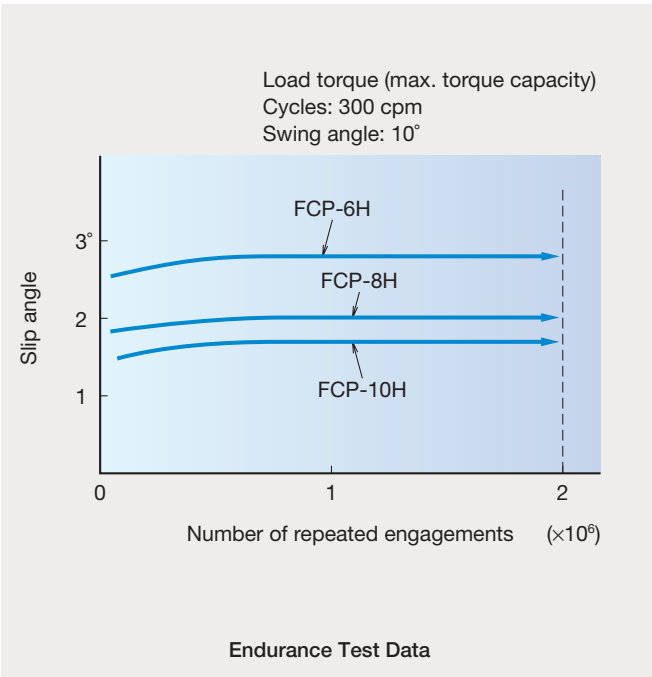

FCP/DF type

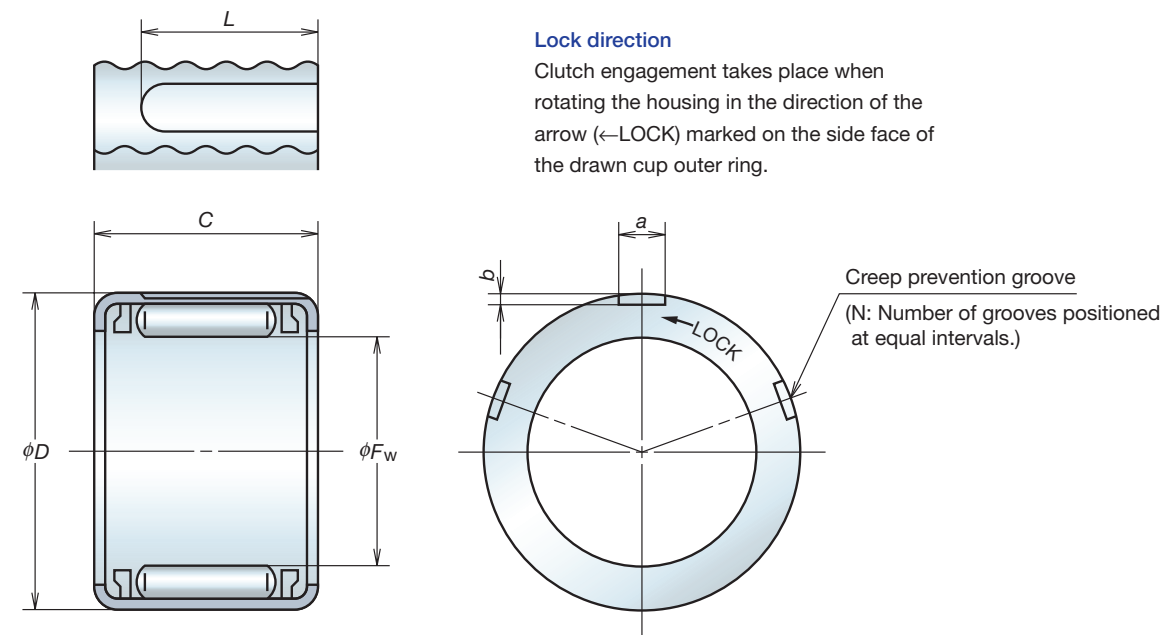

| Roller Clutch Numbers | Boundary Dimensions/Part Dimensions (mm) |     |     |     |      |     |     | Lock Direction | Torque Capacities | Overrun Torque | Remarks                     |
|-----------------------|--|-----|-----|-----|------|-----|-----|----------------|-------------------|----------------|-----------------------------|
|                       | $F_w$                                    | $D$ | $C$ | $a$ | $b$  | $L$ | $N$ |                | (N·m)             | (mN·m)         |                             |
| DF500401              | 4  | 8   | 6   | 1.0 | 0.25 | 4.0 | 5   | ←              | 0.13              | 1.96           | With stainless steel spring |
| DF500408              | 4  | 8   | 6   | 1.0 | 0.25 | 4.0 | 5   | →              | 0.13              | 1.96           | With stainless steel spring |
| DF500609              | 6  | 10  | 8   | 1.2 | 0.25 | 5.5 | 3   | ←              | 0.44              | 2.94           |                             |
| DF500610              | 6  | 10  | 8   | 1.2 | 0.25 | 5.5 | 3   | →              | 0.44              | 2.94           |                             |
| FCP-6H                | 6  | 12  | 11  | 1.5 | 0.25 | 8.5 | 5   | ←              | 0.90              | 2.94           |                             |
| FCPC-6H               | 6  | 12  | 11  | 1.5 | 0.25 | 8.5 | 5   | →              | 0.90              | 2.94           |                             |
| FCP-8H                | 8  | 12  | 12  | 1.2 | 0.25 | 9.5 | 9   | ←              | 1.67              | 2.94           |                             |
| FCPC-8H               | 8  | 12  | 12  | 1.2 | 0.25 | 9.5 | 9   | →              | 1.67              | 2.94           |                             |
| FCP-10H               | 10                                       | 14  | 12  | 1.2 | 0.25 | 9.5 | 5   | ←              | 2.26              | 3.92           |                             |
| FCPC-10H              | 10                                       | 14  | 12  | 1.2 | 0.25 | 9.5 | 5   | →              | 2.26              | 3.92           |                             |

Note: Stainless steel spring specifications are available for products with bore diameters ( $F_w$ ) 6 mm and 8 mm




■ Features

- 1. Applicable to various types of housing
  - Able to use various types of integrated plastic housings according to requirements.
- 2. High durability
  - Offers superior durability due to outer ring using high precision-drawn material.
- 3. Cost effective
  - Rational design of parts results in low cost.

■ Configuration

Fig. 11 shows an example configuration of a roller clutch unit for a low-cost plastic housing.

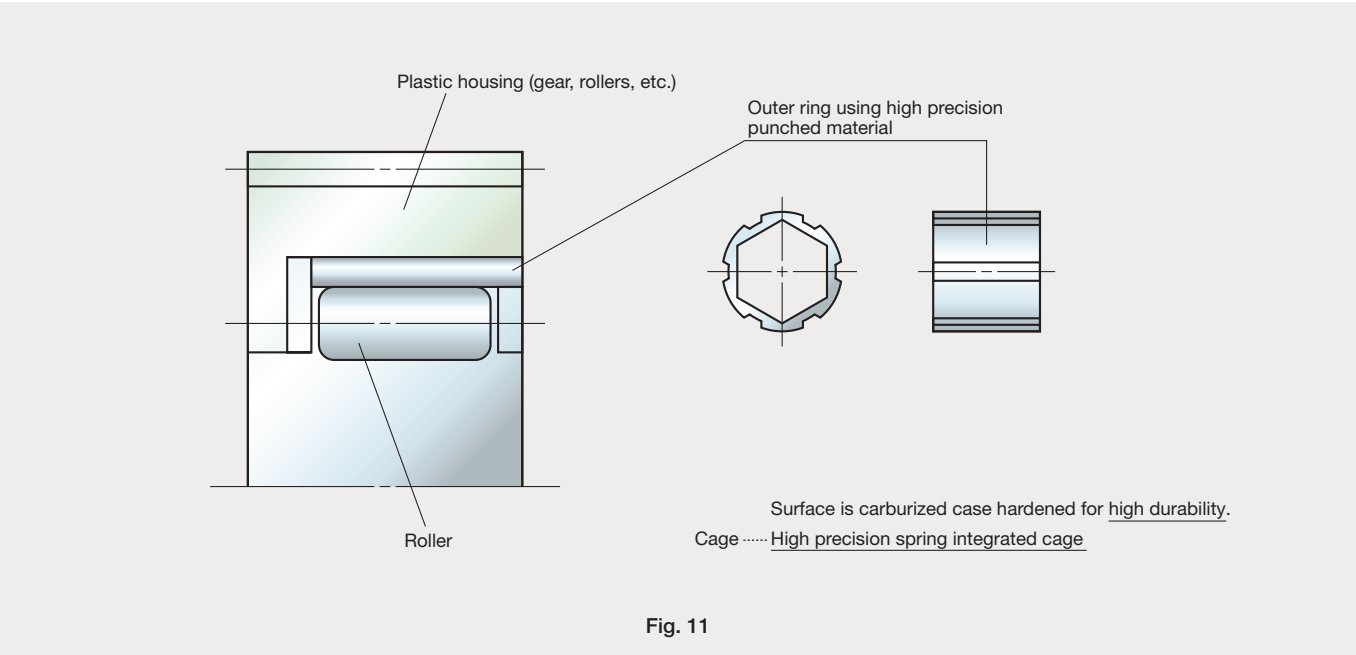


■ Specifications and fitting of shaft and housing

Shaft and housing specification are ordinarily as follows:

- Shaft/material: Metal such as S~C, SS~, SUS
  - Hardness HRC50 or more
- Shaft/accuracy: Class h9
- Shaft/surface hardness: 0.4 R<sub>a</sub>
- Housing: Integrated polyacetyl housing (rollers, gear, etc.);
  - gear precision conforms to \*JGMA class 6.

\*JGMA : Japan Gear Manufactures Association

FCU

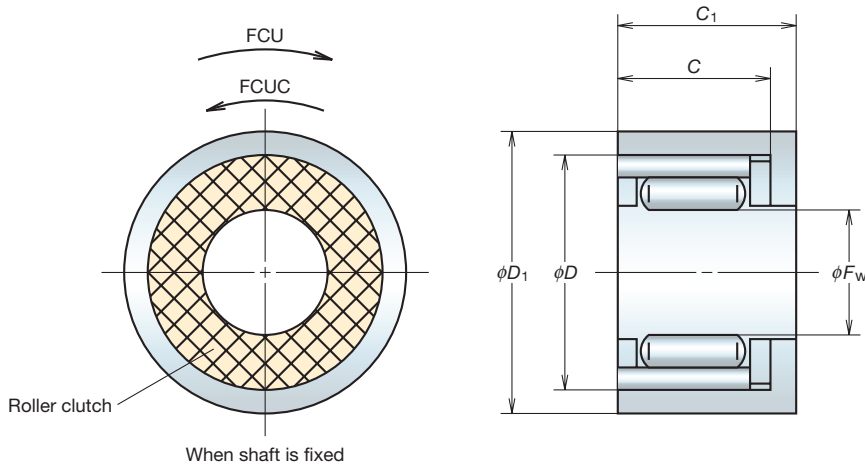

| Roller Clutch Numbers | Clutch Dimensions (mm) |     |     | Unit Dimensions (mm) (min) |       | Torque Capacity | Overrun Torque |
|-----------------------|------------------------|-----|-----|----------------------------|-------|-----------------|----------------|
|                       | $F_w$                  | $D$ | $C$ | $D_1$                      | $C_1$ | (N·m)           | (mN·m)         |
| FCU-6                 | 6                      | 12  | 6.5 | 14                         | 8     | 0.51            | 2.94           |
| FCUC-6                | 6                      | 12  | 6.5 | 14                         | 8     | 0.51            | 2.94           |
| FCU-8                 | 8                      | 15  | 7.5 | 17                         | 9     | 1.02            | 2.94           |
| FCUC-8                | 8                      | 15  | 7.5 | 17                         | 9     | 1.02            | 2.94           |

■ Operating temperature


The operating temperature range of the roller clutch is -10 °C to 90 °C. Contact NSK if you plan to use the roller clutch beyond this range.








■ Life

With the torque capacity given in the dimensions table, the life is 1 million engagements or more.

■ Lubrication

The roller clutch is sealed with special grease and does not need to be replenished. Take steps to prevent ingress of other types of grease or foreign matter during operation.

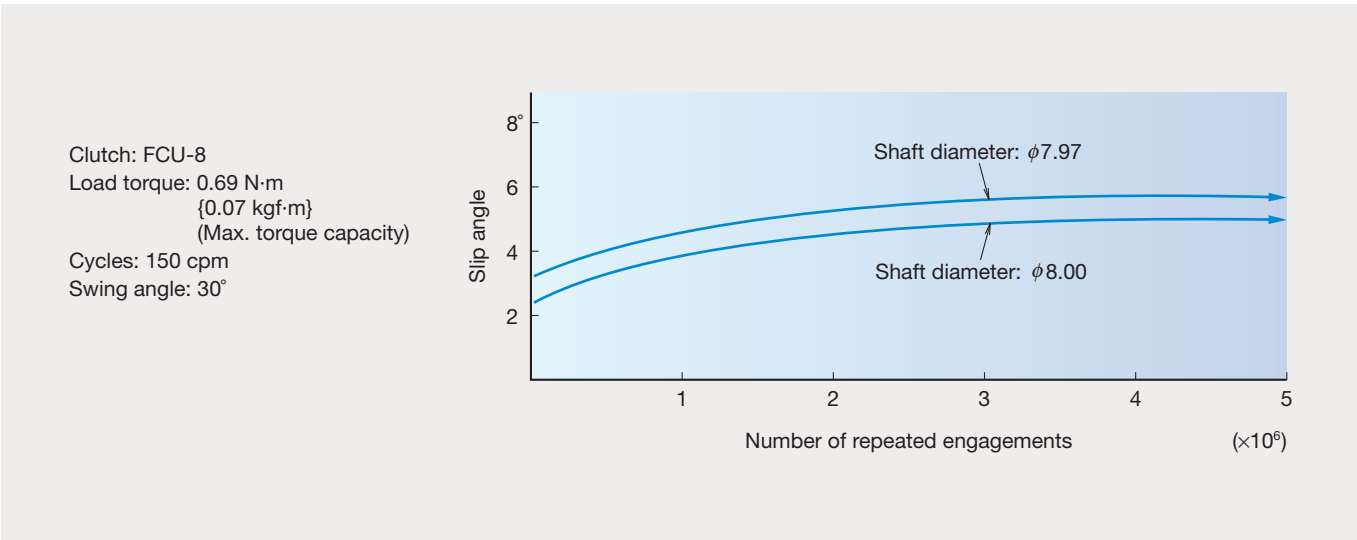

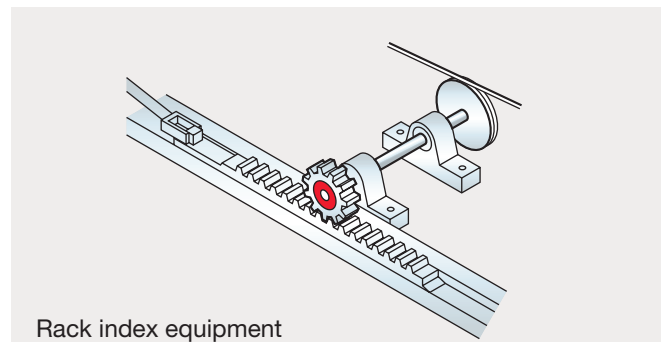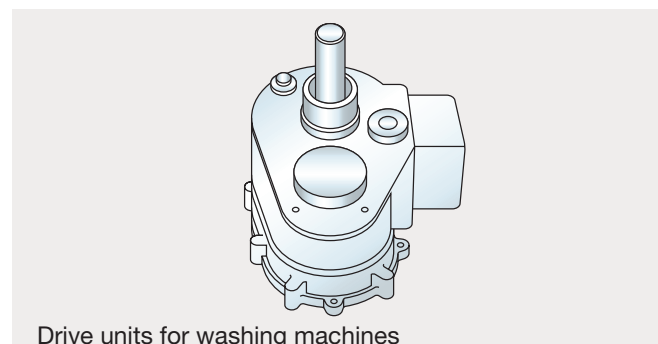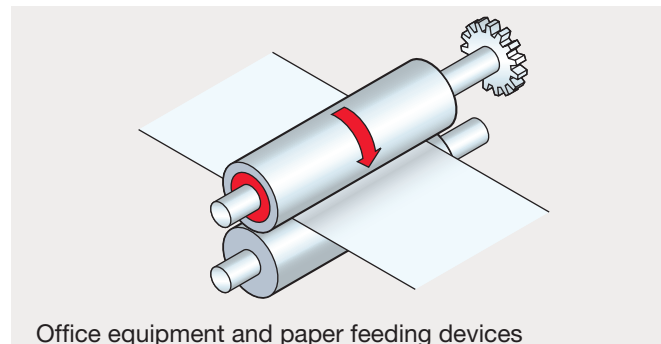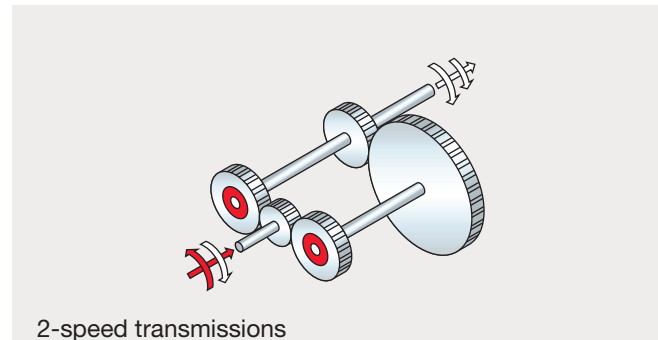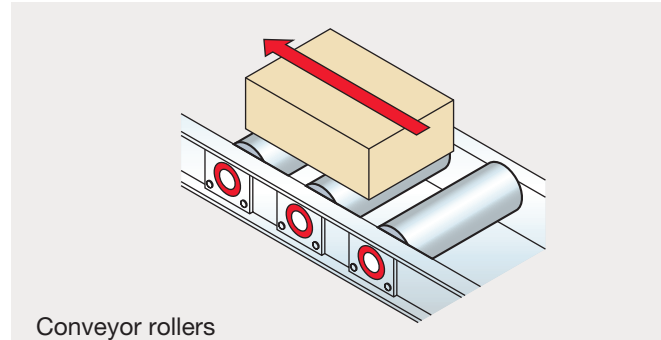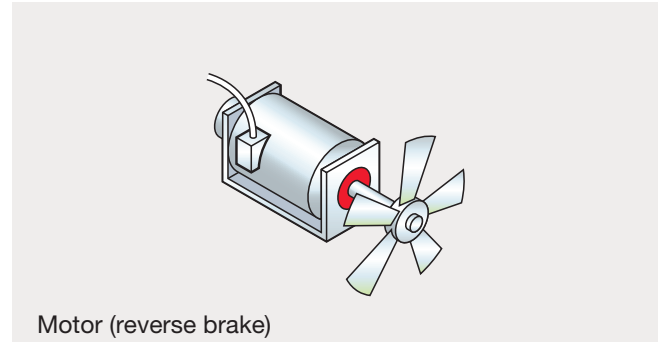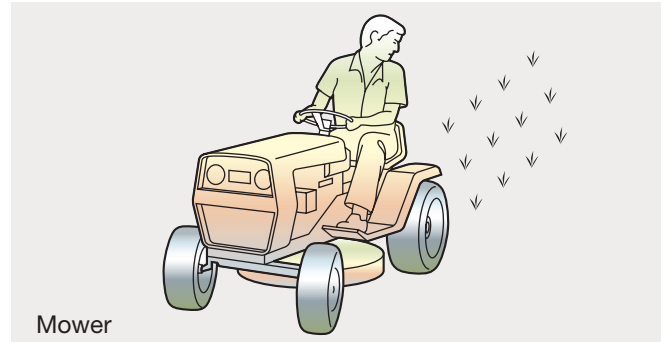

## Precautions for use

Some machines using a one-way clutch generate inertia during operation. Sometimes the transient response at the instant the clutch is locked, in particular, is excessive load torque. (This is caused by the inertia force of the entire motion system surrounding the mounted clutch and therefore is difficult to calculate beforehand.)

If such a case is anticipated, it is necessary to select a clutch after measuring the impact value and correctly calculating the torque imposed on the clutch. In any case, the torque imposed on the clutch should not exceed the torque capacity as shown in the bearing table.

The roller clutch should not be used in an atmosphere that can cause corrosion of parts. If excessive vibration is involved, the clutch may not work properly. Therefore, either refrain from using roller clutches where vibration is involved or attach an effective dampening device. Furthermore, for those parts where an accident may cause injury or critical damage, add effective protection devices to the existing equipment. Also be sure to test the clutches before manufacturing machinery that will use the devices.

## Study of drawn cup roller clutches

Determine the following operating conditions, as far as possible.

### (1) Torque conditions

- |   |             |
|---|-------------|
| ● What is the maximum torque?                     | N·m {kgf.m} |
| ● Which is the driven ring?                       |             |
| ● What is the torque when the clutch is engaged?  | N·m {kgf.m} |
| ● How did you check the torques given above?      |             |
| ● Is torque during engagement constant or random? |             |

## (2) Engagement conditions

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>What is feeding speed at engagement? rpm or cpm</li> </ul>  | Desired life   |
| <ul style="list-style-type: none"> <li>What is feeding speed for one cycle? cpm</li> </ul>         | <ul style="list-style-type: none"> <li>What is the total number of engagements? times</li> </ul> |
| <ul style="list-style-type: none"> <li>What is the tolerance for feeding angle error? °</li> </ul> |  |

### (3) Load conditions

- |  |         |   |
|--|---------|---|
| <ul style="list-style-type: none"> <li>What is the method of aligning shaft and housing when using the RC or FC type?</li> </ul> |         |   |
| <ul style="list-style-type: none"> <li>What is the maximum load?</li> </ul>  | N {kgf} | <b>Desired life</b><br><br><ul style="list-style-type: none"> <li>What is the desired life in hours?</li> </ul> |
| Overrun speed:   |         |   |
| <ul style="list-style-type: none"> <li>What is the maximum overrun speed?</li> </ul>   | rpm     |   |
| <ul style="list-style-type: none"> <li>What is the average overrun speed?</li> </ul>   | rpm     |   |

#### (4) Mounting conditions

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>What is the shaft diameter and tolerance?</li> </ul>      | <ul style="list-style-type: none"> <li>What is the housing bore and tolerance?</li> </ul>       |
| <ul style="list-style-type: none"> <li>What is the shaft made of?</li> </ul>                     | <ul style="list-style-type: none"> <li>What is the housing made of?</li> </ul>                  |
| <ul style="list-style-type: none"> <li>What is the shaft hardness and hardness depth?</li> </ul> | <ul style="list-style-type: none"> <li>What are the outer dimensions of the housing?</li> </ul> |

### (5) Environmental conditions

- What is the operating temperature range?
- What type of lubricant and how much is used?
- Is the bearing exposed to vibration? How much and in what direction?

## (6) Safety measures

- Have you considered safety measures in the event the clutch ceases to function?
- Type of clutch you plan to use
- Type of machine and location where clutch is to be used
- Description of vibration mechanism

\* If possible, provide a drawing of your setup (the information will be kept strictly confidential). Make the drawing a block diagram.

[illegible]